

NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

USB3 High Flex Robotic Cable

Max. Data Rate: 10 Gbps

Cable O.D: $6.3 \pm 0.2\text{mm}$

Jacket Color: Orange

Jacket Material: Durable TPE

Cable Shielding: Fully Shielded

Recommended Min. Dynamic Bending Radius: 75.6 mm (12*O.D)


Recommended Min. Static Bending Radius: 47.25mm (7.5*O.D)

Rated Flex Life Cycle: 6,000,000

Temperature Range: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Flammability: UL VW-1

Environmental: RoHS, REACH Compliant

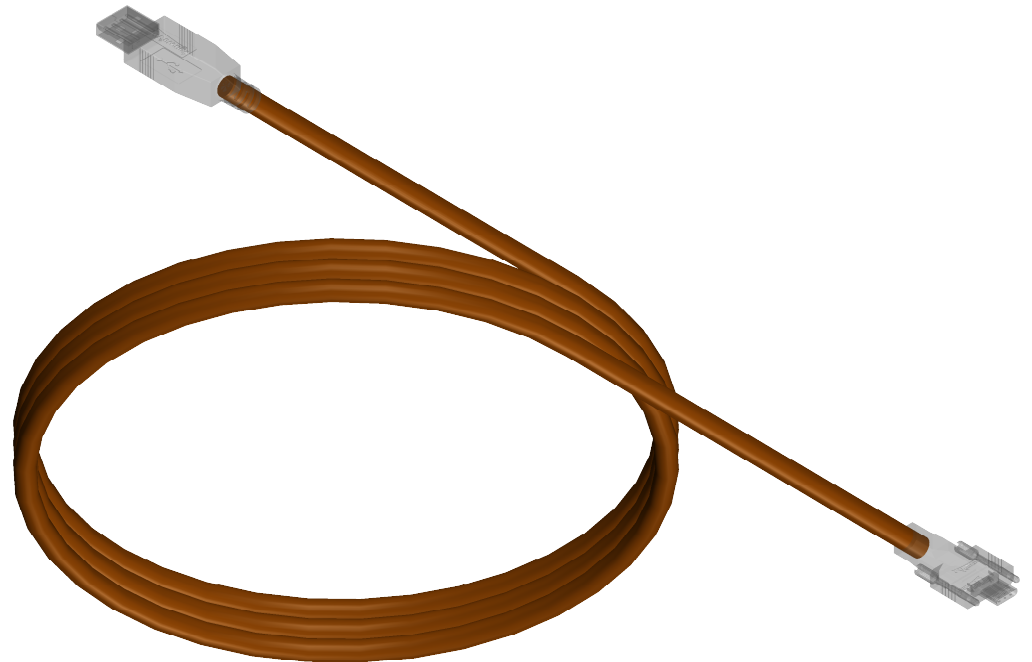

Copyright © Newnex Technology Corp., All Rights Reserved
Units in millimeters