

NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

USB3 Ultra Thin Cable

Max. Data Rate: 5Gbps

Cable O.D: 3.2 ± 0.2 mm

Jacket Color: Black

Jacket Material: TPE


Cable Shielding: Fully Shielded

Recommended Min. Static Bending Radius: 24mm (7.5*O.D)

Temperature Range: -10°C ~ 80°C

Flammability: UL VW-1

Environmental: RoHS, REACH Compliant

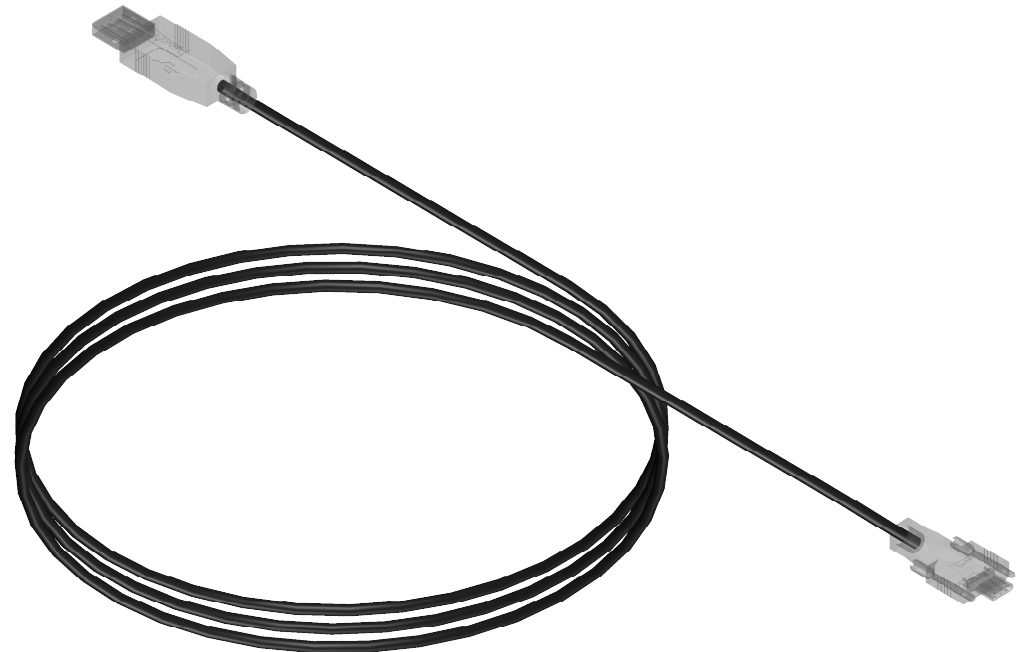

Copyright © Newnex Technology Corp., All Rights Reserved
Units in millimeters